


M.T.C. EAS | EAS Systems

PROMAX RF

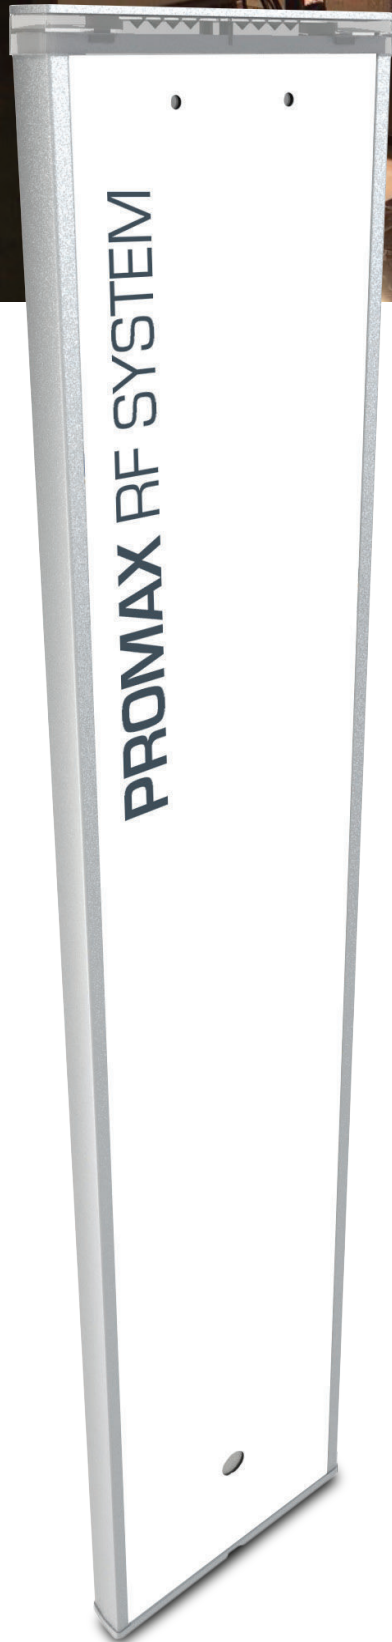

MTC PROMAX RF

M.T.C. PROMAX RF System operates at 8.2 Mhz.

Features:

- Suitable to apply full dressed advertising panels
- Visual (RGB) and audible alarm
- RGB LED
- Low energy-environment friendly

Standard delivered with black inlays.



Technical specifications

PROMAX RF

Detection range	Mono	Dual
Paper Labels 4*4	up to 90 cm	up to 160 cm
Hard Tags 50mm	up to 130 cm	up to 200 cm

Dual Systems: coverage between antennas | Mono Systems: total coverage, both sides of antenna

Technical specs	TRX	RX
Width	31 cm	31 cm
Height	153 cm	153 cm
Depth	4,5 cm	4,5 cm
Weight	16,6 kg	16,6 kg
Mains	110/220 V	
Frequency	RF, 8.2 Mhz	
Operating Temperature	Up to 58°C / 185°F	

Product references

Mono System	XS-R1MPROM82C
Dual System	XS-R2MPROM82C
RX Antenna	XS-R2MPROM82RA

